



Fall Protection

August 2014



Kim Biggs – Shell UAD

Fall Protection Equipment Connectors

Connectors – Auto locking

- Carabineers – Triple Acting vs Double Acting
 - Applies to Lanyard and Harness D-ring Connections
-
- Lanyards
 - SRLs (single & double)
 -
 - Accessories & Emergency Gear
-
- NO “Pelican Hooks/Rebar Hooks”**

HSE0044 Fall Protection & Prevention

September 2013

■ 7.5.1 Lanyards

- Dual Y lanyards with an integral deceleration device and double action self-locking snap hooks or triple action auto-locking captive eye carabineers at each end.
- Equipped with adjustable D-rings with 2.25" minimum ID.
- Not longer than 6'.
- Meets ANSI Z359.1 requirements.
- Synthetic webbed lanyards shall be discarded 5 years after date of manufacture.
- Unused legs of double-leg lanyards shall not be hooked into the dorsal D-ring used for attachment of the primary anchor as a means of preventing them from hanging free.

Connectors for Lanyards and SRLs

■ Lanyards

—Auto locking Double Action
Snaphooks



—Auto locking Triple Action
Carabineers



—SRLs

—Auto locking Double Action
Snaphooks



—Auto locking Triple Action
Carabineers




Connectors for Fall Protection

Carabineers as Connectors to Anchors

- Anchor Connector Carabineers
Auto-locking Double Action



- Connectors for Anchors
—Autolocking Double Action
Snaphooks

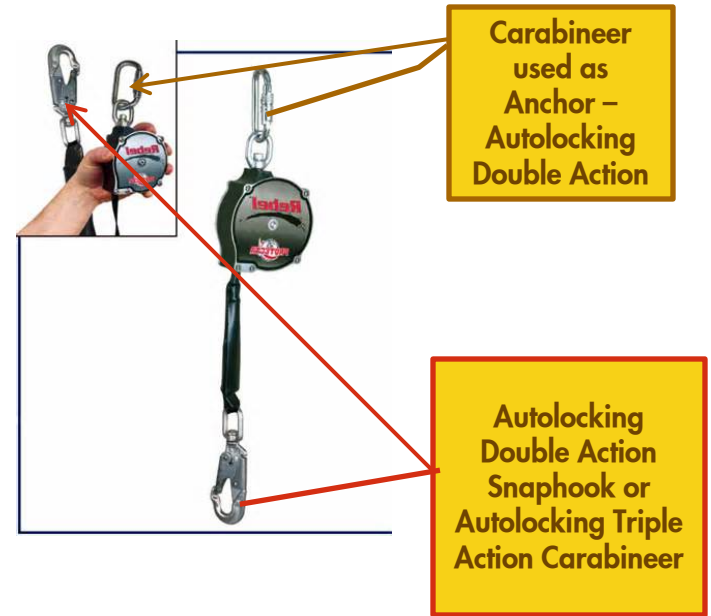

Connectors – Not For Use



■ Operational Safety SharePoint Sites

- <https://eu001-sp.shell.com/sites/AAAAA8432/S18/Web/WorkingHeight.aspxx>
- ❖ <https://eu001-sp.shell.com/sites/AAAAA8432/S18/default.aspx>

■ Lifesaving Rules

■ Mini-Campaigns

- http://sww.shell.com/hse/goal_zero/LSR/index.html

■ HSE0044 UAD Fall Prevention and Protection

- <http://swwus-ep-livelihood.shell.com/livelihood/livelihood.exe/open/7605347?Redirect=1>

Q & A

